

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 December 2005 (01.12.2005)

PCT

(10) International Publication Number
WO 2005/114138 A2

(51) International Patent Classification⁷: **G01N 9/00**

KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:
PCT/US2004/012546

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(22) International Filing Date: 22 April 2004 (22.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **BIODE, Inc.** [US/US]; 100 Larrabee Road, Westbrook, Maine 04092 (US).

Declarations under Rule 4.17:


- as to the identity of the inventor (Rule 4.17(i)) for all designations
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

Published:

- without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MEASUREMENTS OF DENSITY AND VISCOELASTICITY WITH A SINGLE ACOUSTIC WAVE SENSOR

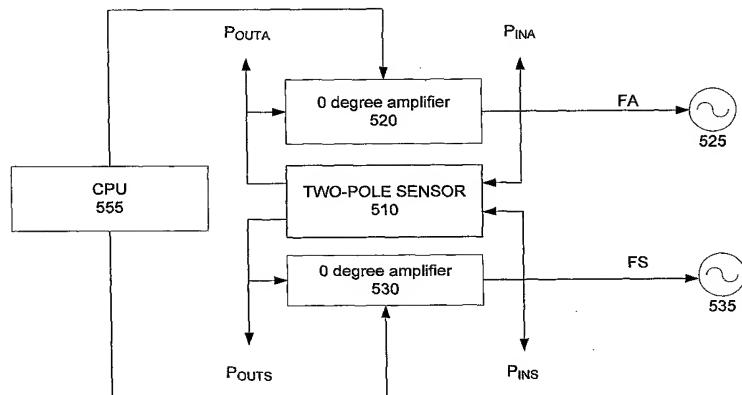

WO 2005/114138 A2

(57) Abstract: A sensor, method and system, for measuring certain characteristics of a fluid. The sensor utilizes a piezoelectric device having at least two tightly coupled resonators providing a two pole electric transfer function responsive to an electrical signal coupled to the input resonator. The piezoelectric sensor has a textured entrainment layer, constructed to entrap a known volume of fluid and impart motion to the entrapped fluid as well as to surrounding non-trapped fluid. The common mode frequency shift of the two resonant frequencies is related to mass loading due to the entrapped fluid, while the energy absorbed by the fluid, or a phase shift of one of the resonant frequencies, is related to the viscosity/density product of the fluid. Extracting the viscosity is a matter of mathematical manipulation. By controlling the energy level of the input electrical signal, the viscosity measurement may be conducted at a predetermined shear rate.